

SURFACE TREATMENT

ALPOLIC® Brake Metal sheets are stocked with a FEVE LUMIFLON™ finish, a fluorocarbon paint system that features a wide range of colors and glosses along with excellent durability and weathering for all your program needs. A PVDF, Kynar finish is also available as a custom request. Both PVDF and FEVE paints meet AMMA 2605

STANDARD SHEET SIZE

Standard stock sheet size is 48" (1219mm) x 120" (3048mm). Minimum order is one (1) sheet of stocked material.

FINISH TOLERANCE

Color: DE 1.0 (solids)
DE 2.5 (metallic flake in color coat)
Gloss: Nominal +/-10 units

PRODUCT TOLERANCE


Width: 48 ± 0.08" (2mm)
Length: 120 ± 0.012" per ft (1mm/meter)
Thickness: 0.032 ± .00094" (without paint)
Squareness: Maximum 0.2" (5mm)

APPLICATION

ALPOLIC® Brake Metal sheets are excellent for roof caps, flashing, fascia trim, and accents. Use in conjunction with ALPOLIC® MCM panels for optimal color consistency.

Beautiful, durable, and safe architectural solutions.

www.alpolic-americas.com | info@alpolic.com

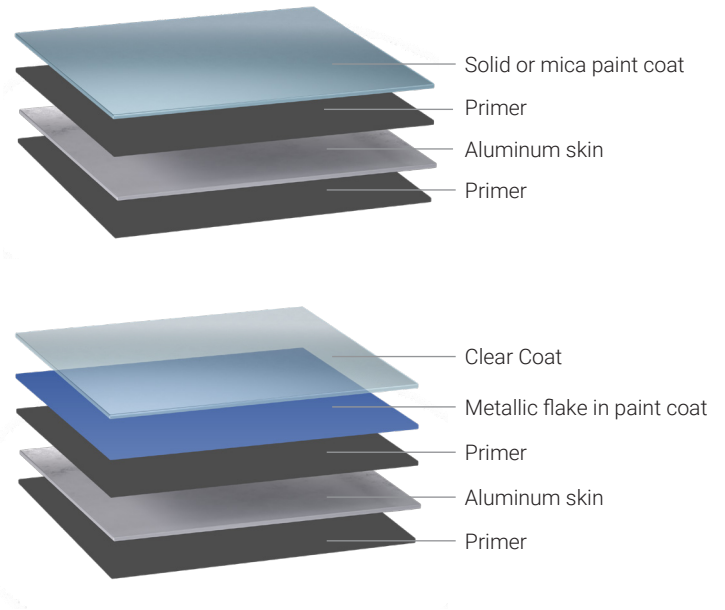

WARRANTY

Material-only finish warranty of 10-35 years is available on some finishes. Requires a minimum bend radius of 2mm. Please contact your sales manager or customer service for more details.

PRODUCT NOTES

- Panels should be stored flat in a dry, indoor environment.
- Sheets are provided with a protective film.
- Protective film should be removed from sheets soon after installation.
- 1,000 square foot minimum required for custom color with an up charge.
- Custom color brake metal orders follows +/- 15% order quantity fulfillment.

Have Questions? We can help!

ALPOLIC® Technical Assistance
800.422.7270 | technicalservices@alpolic.com